

Specifications

| Models | GS-2669 BE | | GS-3369 BE | | GS-4069 BE | |
|------------------------------------|------------|-------------|------------|-------------|------------|------------|
| Measurements | Metric | US | Metric | US | Metric | US |
| Working height maximum* | 9.70 m | 31 ft 9 in | 11.75 m | 38 ft 6 in | 14.12 m | 46 ft 3 in |
| A Platform height maximum | 7.70 m | 25 ft 3 in | 9.75 m | 31 ft 11 in | 12.12 m | 39 ft 9 in |
| B Platform height - stowed | 1.47 m | 4 ft 10 in | 1.47 m | 4 ft 10 in | 1.65 m | 5 ft 5 in |
| C Platform length - outside | 2.79 m | 9 ft 2 in | 2.79 m | 9 ft 2 in | 2.79 m | 9 ft 2 in |
| extended | 4.31 m | 14 ft 2 in | 4.31 m | 14 ft 2 in | 4.31 m | 14 ft 2 in |
| Slide-out platform extension deck | 1.52 m | 5 ft | 1.52 m | 5 ft | 1.52 m | 5 ft |
| D Platform width - outside | 1.6 m | 5 ft 3 in | 1.6 m | 5 ft 3 in | 1.6 m | 5 ft 3 in |
| Toeboard height | 0.15 m | 6 in | 0.15 m | 6 in | 0.15 m | 6 in |
| E Height -stowed | 2.59 m | 8 ft 6 in | 2.59 m | 8 ft 6 in | 2.74 m | 9 ft |
| rails lowered | 1.92 m | 6 ft 3.5 in | 1.92 m | 6 ft 3.5 in | 2.08 m | 6 ft 10 in |
| F Length - stowed | 3.12 m | 10 ft 3 in | 3.12 m | 10 ft 3 in | 3.12 m | 10 ft 3 in |
| platform extended | 4.50 m | 14 ft 9 in | 4.50 m | 14 ft 9 in | 4.50 m | 14 ft 9 in |
| with outriggers | 3.76 m | 12 ft 4 in | 3.76 m | 12 ft 4 in | 3.76 m | 12 ft 4 in |
| G Width | 1.75 m | 5 ft 9 in | 1.75 m | 5 ft 9 in | 1.75 m | 5 ft 9 in |
| H Wheelbase | 2.29 m | 7 ft 6 in | 2.29 m | 7 ft 6 in | 2.29 m | 7 ft 6 in |
| I Ground clearance - center | 0.24 m | 9.5 in | 0.24 m | 9.5 in | 0.24 m | 9.5 in |

Productivity

| Maximum platform occupancy (indoor/outdoor) | 4/4 | | 4/2 | | 3/2 | |
|---|-------------|-----------|-------------|-----------|-------------|----------|
| Lift capacity | 680 kg | 1,500 lbs | 454 kg | 1,000 lbs | 363 kg | 800 lbs |
| Lift capacity - extension deck | 300 kg | 136 lb | 300 kg | 136 lb | 300 kg | 136 lb |
| Drive height | full height | | full height | | full height | |
| Drive speed - stowed | 7.2 km/h | 4.5 mph | 7.2 km/h | 4.5 mph | 7.2 km/h | 4.5 mph |
| Drive speed - raised | 0.5 km/h | 0.3 mph | 0.5 km/h | 0.3 mph | 0.5 km/h | 0.3 mph |
| Gradeability - uphill stowed** | 35% | | 35% | | 35% | |
| Maximum outrigger levelling: | | | | | | |
| front/back uphill | 5.3° / 4.2° | | 5.3° / 4.2° | | 5.3° / 4.2° | |
| side to side | 11.7° | | 11.7° | | 11.7° | |
| Turning radius - inside | 2.11 m | 83 in | 2.11 m | 83 in | 2.11 m | 83 in |
| Turning radius - outside | 4.6 m | 181.2 in | 4.6 m | 181.2 in | 4.6 m | 181.2 in |
| Raise/lower speed | 34/31 sec | | 39/29 sec | | 61/28 sec | |
| Drive | two wheel | | two wheel | | two wheel | |
| Tyres - non-marking rough terrain | 30x66 cm | 12x26 in | 30x66 cm | 12x26 in | 30x66 cm | 12x26 in |

Power

| Power source | 48V DC (eight 6V batteries, 225 Ah capacity) | | 48V DC (eight 6V batteries, 225 Ah capacity) | | 48V DC (eight 6V batteries, 260 Ah capacity) | |
|---------------------------|--|--------|--|--------|--|--------|
| Hydraulic system capacity | 68.1 L | 18 gal | 68.1 L | 18 gal | 68.1 L | 18 gal |

Sound & Vibration Levels


| | | | | | | |
|---|-----------------------|---------------------------|-----------------------|---------------------------|-----------------------|---------------------------|
| Sound pressure level (ground workstation) | 71 dBA | 71 dBA | 71 dBA | 71 dBA | 71 dBA | 71 dBA |
| Sound pressure level (platform workstation) | 75 dBA | 75 dBA | 75 dBA | 75 dBA | 75 dBA | 75 dBA |
| Vibration | <2.5 m/s ² | <8 ft 2 in/s ² | <2.5 m/s ² | <8 ft 2 in/s ² | <2.5 m/s ² | <8 ft 2 in/s ² |

Weight***

| | | | | | | |
|---|------------|-----------|------------|-----------|------------|------------|
| CE base machine | 3,859 kg | 8,504 lbs | 3,741 kg | 8,243 lbs | 4,893 kg | 10,815 lbs |
| The basic unit has the extension deck, no outriggers, non marking RT tyres, CE link guard and CE load sense | | | | | | |
| Weight modifiers for options: | | | | | | |
| Outriggers | add 392 kg | 865 lbs | add 392 kg | 865 lbs | add 392 kg | 865 lbs |

Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280); 2004/108/EC (EMC); 2006/95/EC (LVD)

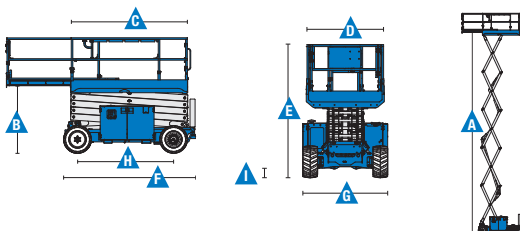

* The metric equivalent of working height adds 2 m to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 *** Weight will vary depending on options and/or country standards.

Features

| Standard Features | Easily Configured To Meet Your Needs | Options & Accessories |
|-------------------|--------------------------------------|-----------------------|
|-------------------|--------------------------------------|-----------------------|

Measurements

GS-2669 BE Hybrid

- 9.70 m (31 ft 9 in) working height
- Up to 680 kg (1,500 lbs) lift capacity

GS-3369 BE Hybrid

- 11.75 m (38 ft 6 in) working height
- Up to 454 kg (1,000 lbs) lift capacity

GS-4069 BE Hybrid

- 14.12 m (46 ft 3 in) working height
- Up to 363 kg (800 lbs) lift capacity

Productivity

- Integrated 2.1 kW generator powered by Kohler KD350, 6 hp (4.4 kW) diesel engine
- Generator AC power to platform
- Generator AC power to chassis
- Drive at full height
- AC sealed drive motors
- Folding guardrails with full height swing-gate
- Smart Link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics)
- Platform control with battery charge indicator and diagnostic display
- On-board diagnostic system
- Positive traction control
- Regenerative braking
- Tilt level sensor with audible alarm
- Descent alarm
- Flashing LED beacons
- Horn
- Hour meter
- Certified load sensor
- Telematics-Ready Connector

Power

- 48 V DC battery pack

Platform

- 2.79 x 1.60 m (9 ft 2 in x 5 ft 3 in) steel frame platform with replaceable aluminium deck
- 1.52 m (5 ft) slide-out extension deck

Outriggers Options

- Automatic levelling hydraulic outriggers⁽¹⁾

Power Options

- 48 V DC (eight 6 V batteries), 225 Ah (standard on GS-2669 BE and GS-3369 BE)
- 48 V DC (eight 6 V batteries), 260 Ah (standard on GS-4069 BE)

Drive

- 2 x 4

Axle

- Front oscillating axle

Tyre Options

- Foam-filled, non-marking rough terrain

Productivity Options

- Air line to platform
- Power to platform (incl. plug, socket and ground fault interrupt on request)
- Biodegradable hydraulic oil ⁽¹⁾
- Track & Trace⁽²⁾ (GPS unit providing machine location & operating information)
- Motion alarm

Power Options

- Low temperature cut-out module



03/17 Part No. B127304UK

United Kingdom

The Maltings, Wharf Road, Grantham NG31 6BH, T: +44 800 988 3739 (toll free), Fax +44 (0)1476 584334, Email AWP-InfoEurope@terex.com
Visit www.genielift.co.uk/locations to view our global locations list.

Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico · Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2017 Terex Corporation.

